

PPA/PPC 9-12-18-26-35-45

PRESSA PNEUMATICA

PNEUMATIC PRESS



EV
ENOVENETA





PRESSA PNEUMATICA PNEUMATIC PRESS

CARATTERISTICHE DI SERIE:

- Telaio in acciaio inox AISI 304 su ruote
- PLC programmabile con display 12", completo di opzione "fast" e concatenamento programmi di pressatura **7**
- Valvola di carico assiale
- Quadro di automazione per pompa di carico assiale e scarico mosto
- Compressore centrifugo e soffiante integrati **2**
- Vasca raccolta mosto estraibile (PP 9, 12) **1**
- Vasca raccolta mosto sospesa (PP 18, 26, 35, 45) **1**
- Voltaggio standard 400/3/50 (PP 9, 12 anche 230/1/50)
- **Cilindro lucidato BA internamente**
- **Canaline drenanti lucidate BA (per PPC)** **6**

ACCESSORI:



- Valvola di carico assiale pneumatica (PP 45) **4**
- Pressostato per carico assiale **3**
- Sonde di livello per vasca di scarico mosto
- Valvola pneumatica per selezione mosto
- Porta pneumatica (PP 45)
- Chiusura ermetica della porta (solo modelli PPC)
- Dispositivo iniezione gas inerte (solo modelli PPC)
- Compressore ausiliario porta pneumatica (PP 45)
- Vasca raccolta mosto su ruote **8**
- Lavaggio esterno cilindro (per modelli PPA)
- Lavaggio interno canalette (per modelli PPC)
- Telaio su ruote motorizzate (PP 26, 35, 45)
- Rialzi gambe
- Tramoggia per carico con bins **5**

STANDARD FEATURES:

- AISI 304 stainless steel frame on wheels
- Programmable PLC with 12" display, complete of "fast" option and pressing program linking **7**
- Axial feeding valve
- Control panel for axial pump and must discharge
- Integrated compressor and blower **2**
- Extractable must collecting basin (PP 9, 12) **1**
- Hang up must collecting basin (PP 18, 26, 35, 45) **1**
- Standard voltage 400/3/50 (PP 9, 12 also 230/1/50)
- **Pressing cylinder polished BA internally** **6**
- **Polished BA internal drainage channels (PPC)**

OPTIONALS:

- Pneumatic axial feeding valve (PP 45) **4**
- Axial load pressure switch **3**
- Must collecting basin level probes
- Must selection pneumatic valve
- Pneumatic door (PP 45)
- Hermetic door sealing (only PPC models)
- Inert gas injection system (only PPC models)
- Auxiliary compressor for pneumatic door (PP 45)
- Must collecting basin on wheels **8**
- External washing system (only PPA models)
- Draining channels washing system (only PPC models)
- Wheels motorization (PP 26, 35, 45)
- Legs extension
- Hopper for loading with bins **5**

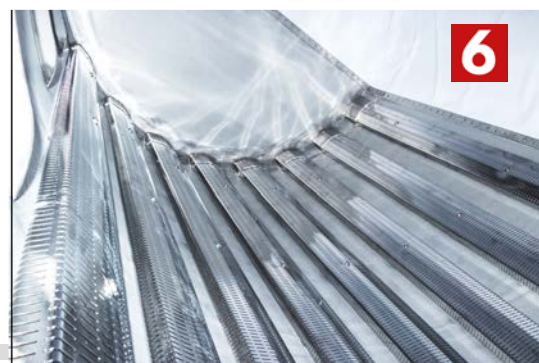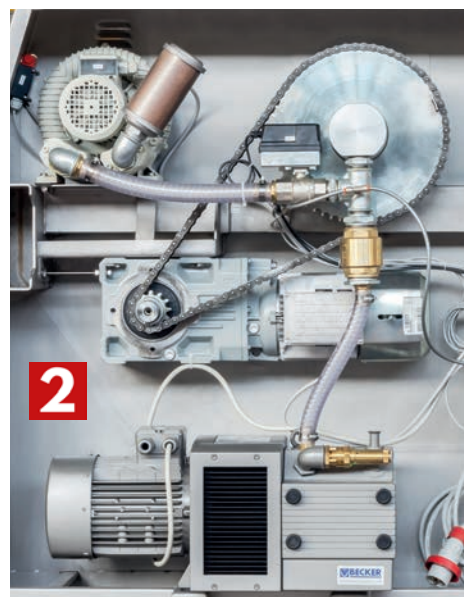

DATI TECNICI TECHNICAL DATA



		9	12	18	26	35	45
Uva intera <i>Whole grape</i>	Ton	0.6/0.7	0.8/0.9	1.2/1.4	1.7/1.9	2.3/2.6	3.0/3.3
Uva diraspata/pigiata <i>Destemmed/pressed grape</i>	Ton	1.8/2.0	2.5/3.0	3.5/4.5	5.0/6.0	6.5/8.0	9.5/10.5
Massa fermentata <i>Fermented mass</i>	Ton	2.6/2.8	3.5/4.5	5.0/6.5	7.5/9.0	10.0/12.0	14.0/18.0
Valvola carico assiale <i>Axial load valve</i>	ø mm	80	100	100	100	100 (120)	120
Raccordo vasca raccolta mosto <i>Must collecting basin fitting</i>	ø mm	60	60	60	60	60	80
Capacità vasca raccolta mosto <i>Must collecting basin capacity</i>	lt	225	350	200	230	230	450
Potenza motore rotazione <i>Rotation motor power</i>	kW	0.75	0.75	0.75	1.1	1.5	2.2
Potenza compressore <i>Compressor power</i>	KW	2.2	2.2	2.2	3.0	4.0	4.0
Potenza soffiante <i>Blower power</i>	kW	0.37	0.37	0.37	0.37	1.1	1.5
Lunghezza <i>Length</i>	mm	2300	2650	3400	3450	4080	4600
Profondità <i>Depth</i>	mm	1250	1380	1380	1580	1980	1830
Altezza <i>Height</i>	mm	1570	1670	1670	1920	1920	2100
Peso <i>Weight</i>	Kg	460	660	850	1100	1200	1700

Dati e misure non sono impegnativi e possono essere variati senza preavviso.
Measurements and operating data are not legally binding and subject to change without notice.



Enoveneta S.p.A.

Via Marconi, 56
35016 Piazzola sul Brenta (PD) - ITALY
T. +39 049 5590358 - F. +39 049 9600002
info@enoveneta.it

Enoveneta France

ZAC de Nicopolis, 292 Rue Vermentino
83170 Brignoles - FRANCE
T. +33 04 94 04 54 13 - F. +33 04 94 04 03 33
france@enoveneta.it

Enoveneta Brasil

Rua Joao Antonio Covolan
136 B. Santa Catarina
95030-410 Caxias do Sul (RS) – BRASIL

www.enoveneta.it

